



KRYPTONPOS
RESTAURANT



How to Connect Krypton Mobile to Krypton POS

How to Connect Krypton Mobile to Krypton POS

Note: Please download and install Krypton POS from the provided link. And download and install Kmobile from clover app market using your clover devices.

1. Open **Krypton BO** > **General Settings** > **Device Setup**.
2. In the **Mobile Setup**, enable the **Mobile Webservice**.


*Note: This set up needs internet connection to download all necessary folders and files.

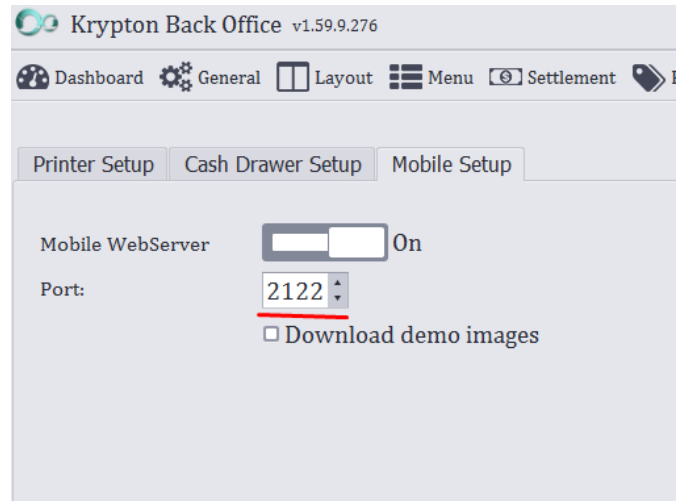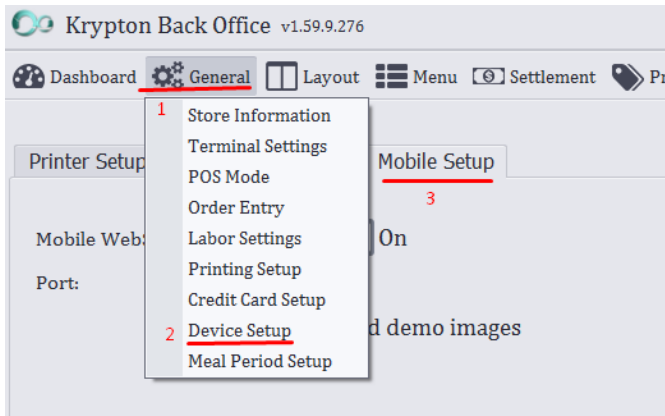


3. Open **Krypton POS** in your computer.
4. Open **Spooler** located in the upper right side of the main screen.



6. Enable **Auto Start Mobile Printing** and **activate mobile printing** to get the IP address of the and the port that will be used for printing. (Example: for the computer below, 10.0.0.84 is the IP address and 28 is the port for mobile printing)


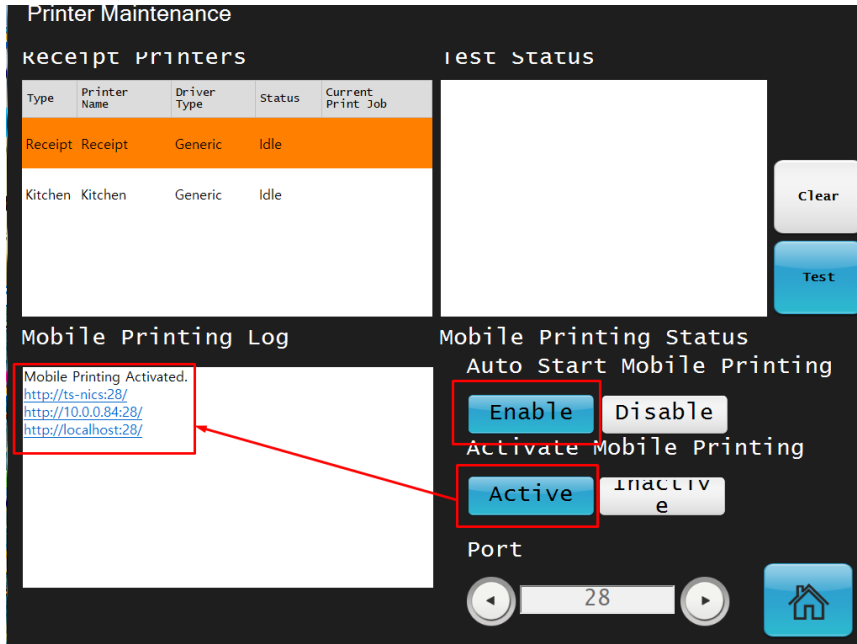


7. On your android device or clover device, open **Kmobile**.
8. Click the **gear icon** in the upper right corner to set up connection to Krypton POS

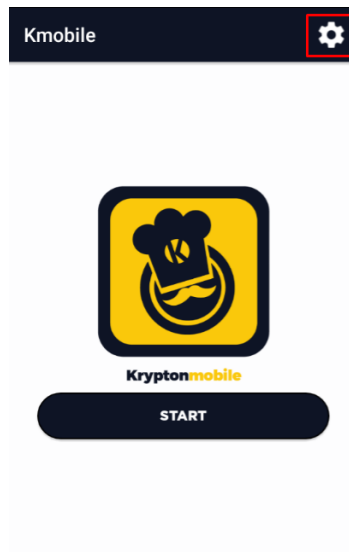


9. In the **Webservice** settings, enter the IP address of the computer shown in the Spooler Section of Krypton POS and use the port indicated in Krypton BO


*Note: Follow this format: **10.0.0.84:2122/kmobile.**
ip_address:port/kmobile*

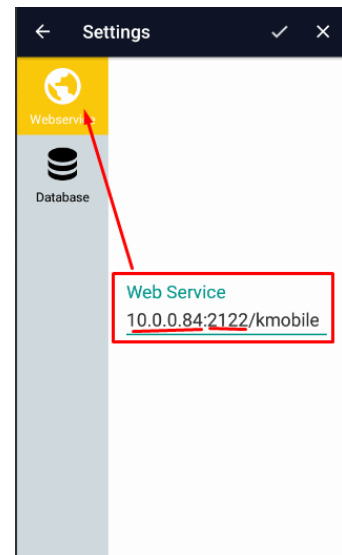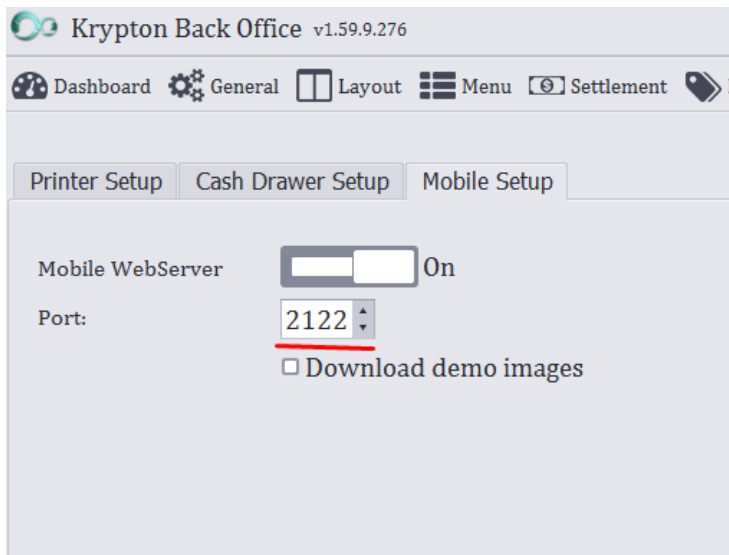


10. In the **Database** settings, enter the IP address for the **Host** and the database name that Krypton POS uses. Just leave the username, password and port with the same value.

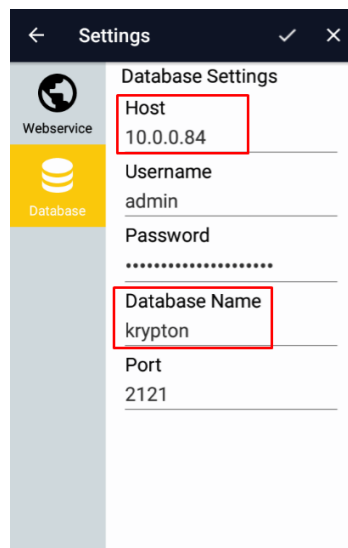

11. After setting up, click the **check icon** in the upper left of the screen. Then click **Start**.
12. Kmobile will ask for you to register your device to krypton. Enter any device name that you want.
13. After that, Kmobile will take you to its home screen showing **Table Ordering** and **Powerbill**.
14. To let Kmobile print table orders to your kitchen printer, open **Krypton BO**.
15. Go to **General** settings, then click **Terminal Settings**.
16. Select the device name in the left side of the screen.

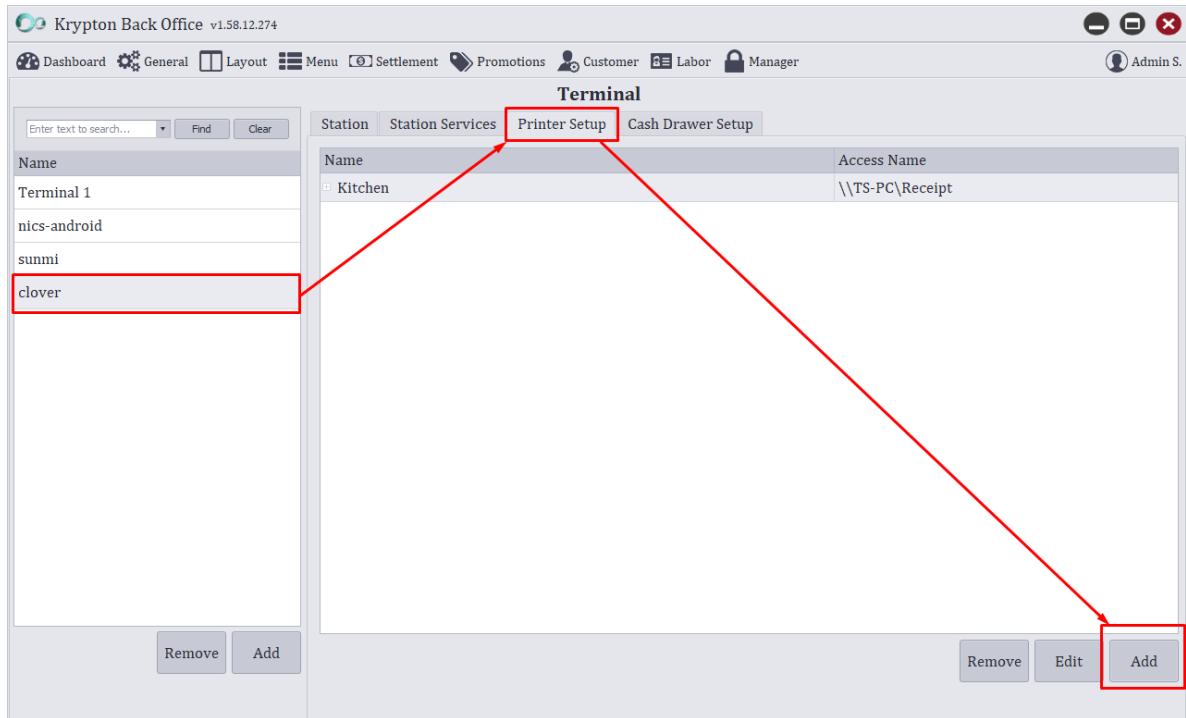

17. Select kitchen printer then enter access name. Click **Save** to save setup.
18. Close Kmobile to make changes take effect first then open it again.
19. Click the **gear icon** above then go to **Printer** settings.
20. Enter the IP address of the computer and the port which is shown in the Krypton POS spooler settings. Then click **REFRESH LIST** always until the list of printers in your network appears.

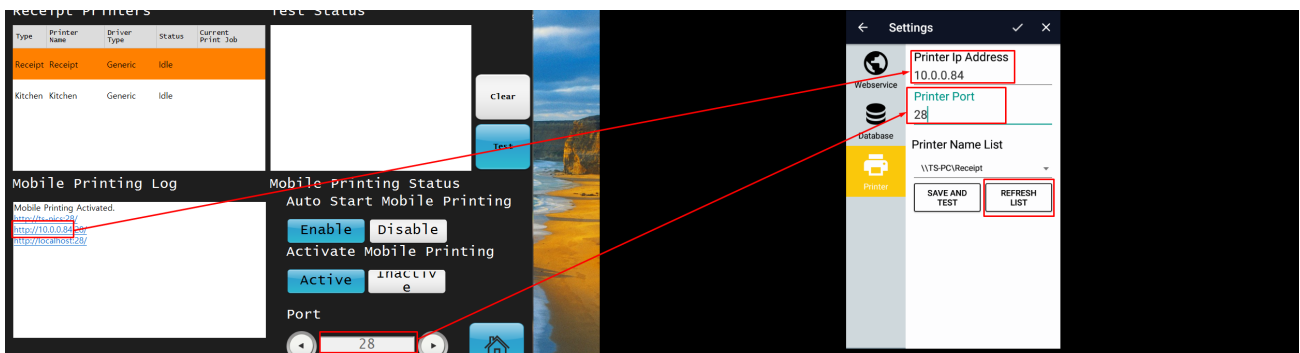

16. To test if it is printing, select the printer name or the access name of the kitchen printer that has been set up in Krypton BO then tap **Save and Print**, and the printer will print a sample page. Then click **check** icon to save changes.
17. Your Kmobile is now ready to go!

